




Straight Shaft Brushcutters

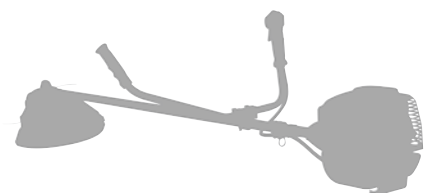

   technology made in Italy

Brushcutters

product's details

GEARBOX



Reliable heavy duty gearboxes designed to resist to the most severe working conditions.

HANDLE



The handles are ergonomically designed and rubber coated to ensure the best working comfort. The ACTIVE bicycle handles can be adjusted separately on each side.




TRANSMISSION



Transmissions made of special material, light but heavy duty. Transmissions shafts (except models 2.5 and 2.9) have 6 self-lubricating bushings to reduce vibrations. All these features guarantee the maximum comfort to the operator.

HARNESSES - NYLON HEADS

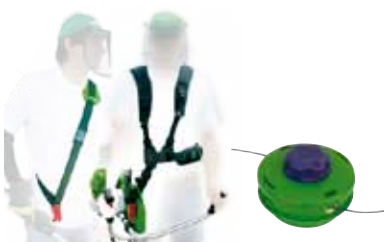

Have been designed to guarantee to the operator the maximum comfort and safety. All brushcutters fit the patented ACTIVE nylon heads and PLATINO line.

SHOCK ABSORBER



To reduce vibrations, shock absorbers have been positioned between the engine and the transmission. A patented TDS (Twin Dumper System) is used on all B-T models. This system has been developed by Active engineers to reduce the vibrations and to comply to the most severe regulations on this matter.

FUEL TANK



A larger cap on the gasoline tank makes easy the filling operation. All pipes are manufactured in Viton, special material resisting to unleaded fuel corrosion and high temperatures. Special device to avoid Vapor-Lock.



DIGITAL IGNITION



The digital ignitions have been specifically developed by ACTIVE to offer better performances. The digital ignition guarantees an easier start of the engine in any condition, a cleaner engine and lower emissions.

CARBURETTOR



Walbro diaphragm carburettors with primer are used on all engines. Diaphragms are made of a special material (Mylar) used to guarantee good and long performances even using unleaded fuel with high percentage of alcohol and/or alkyl fuels.

CLUTCH



All ACTIVE brushcutters (except models 2.5 and 2.9) are equipped with an heavy duty 78 mm clutch with two shoes. The large clutch ensures a longer life and guarantees all power to be transferred to the cutting device.

MUFFLER



The special material (thickness 1,0 mm), used in manufacturing the muffler, reduces the noise emissions. The Active technology used in producing this component guarantees a longer life of the muffler due to reduced wear (caused by hot temperatures and oil).

DECOMPRESSOR



Some models are equipped with a decompressor to guarantee an easy start with very low effort. This device eliminates the kick back and ensure a longer life of starter components.

AIR FILTER



Double stage air filters. These filters guarantee longer engines life and lower maintenance costs. A paper filter kit (ideal for very dusty conditions) is available, as an option, for 4.5 - 5.5 - 6.5 engines.

ENGINE CRANKSHAFT - PISTON



The two pieces crankshafts with two counterweights are made of high quality steel. The special design reduces vibrations and guarantees high performances. Piston: Ultra light pistons are used to reduce vibrations. All pistons made of special cast iron have two pistons rings to ensure a longer life of the engine.

Brushcutters

straight shaft

MOD. 2.5 - 2.9 - shaft ø 24 mm



Mod. L

Mod. B

Model	Code	Displacement cc	Power Hp/Kw	Carburettor Walbro	Ignition	Air filter	Clutch ø mm	Fuel tank capacity lt.	Weight kg	Equipment	Price
2.5 L	250804	24.5	1.4/1.03	WYC	electronic	single	54	0.5	4.8	Nylon head 120 8x1.25 sx. f.	
2.5 B	250802	24.5	1.4/1.03	WYC	electronic	single	54	0.5	5.3		
2.9 L	290004	28.5	1.7/1.25	WYC	electronic	single	54	0.5	4.8	Ergonomic single strap harness mod. Easy	
2.9 B	290002	28.5	1.7/1.25	WYC	electronic	single	54	0.5	5.3		

10

MOD. 2.6 - 3.0 - shaft ø 26 mm



Mod. L

Mod. B

Model	Code	Displacement cc	Power Hp/Kw	Carburettor Walbro	Ignition	Air filter	Clutch ø mm	Fuel tank capacity lt.	Weight kg	Equipment	Price
2.6 L	260004	26.0	1.5/1.1	WYK	digital	single	78	0.6	5.8	Nylon head 120 10x1.25 sx. f.	
2.6 B	260002	26.0	1.5/1.1	WYK	digital	single	78	0.6	6.3		
3.0 L	300004	29.0	1.8/1.3	WYK	digital	single	78	0.6	5.8	Ergonomic single strap harness mod. Easy	
3.0 B	300002	29.0	1.8/1.3	WYK	digital	single	78	0.6	6.3		

Brushcutters

straight shaft

MOD. 3.5 - 4.0 - shaft ø 26 mm



Model	Code	Displacement cc	Power Hp/Kw	Carburettor Walbro	Ignition	Air filter	Clutch ø mm	Fuel tank capacity lt.	Weight kg	Equipment	Price
3.5 L	350004	35.0	2.0/1.47	WYK	digital	single	78	0.8	6.3	Nylon head 120 10x1.25 sx. f.	
3.5 B	350002	35.0	2.0/1.47	WYK	digital	single	78	0.8	6.8	Ergonomic single strap harness (mod. L)	
4.0 L	400004	38.0	2.3/1.7	WYK	digital	single	78	0.8	6.5	Ergonomic double strap harness (mod. 4.0 B)	
4.0 B	400002	38.0	2.3/1.7	WYK	digital	single	78	0.8	7.0	Professional blade	

MOD. Griffe 4.5 - 5.4 - shaft ø 26 mm



Model	Code	Displacement cc	Power Hp/Kw	Carburettor Walbro	Ignition	Air filter	Clutch ø mm	Fuel tank capacity lt.	Weight kg	Equipment	Price
Griffe 4.5 L	454044	42.7	2.6/1.9	WYK	digital	double	78	1.1	7.5	Nylon head 120 10x1.25 sx. f.	
Griffe 4.5 B	454042	42.7	2.6/1.9	WYK	digital	double	78	1.1	7.8	Ergonomic single strap harness (mod. L)	
Griffe 5.4 L	554044	51.7	3.0/2.2	WYK	digital by decompressor	double	78	1.1	7.5	Ergonomic double strap harness (mod. B)	
Griffe 5.4 B	554042	51.7	3.0/2.2	WYK	digital by decompressor	double	78	1.1	7.8	Professional blade	

Brushcutters

straight shaft

MOD. 4.5 - 5.5 - 6.5 - shaft ø 30 mm




Model	Code	Displacement cc	Power Hp/Kw	Carburettor Walbro	Ignition	Air filter	Clutch ø mm	Fuel tank capacity lt.	Weight kg	Equipment	Price
4.5 L	450004	42.7	2.6/1.9	WYK	digital	double	78	1.1	7.9	Nylon head 120 (150 for mod. 6.5) 10x1.25 sx. f.	
4.5 B	450002	42.7	2.6/1.9	WYK	digital	double	78	1.1	8.2		
5.5 L	550004	51.7	3.0/2.2	WYK	digital by decompressor	double	78	1.1	7.9	Ergonomic single strap harness Easy (mod. L)	
5.5 B	550002	51.7	3.0/2.2	WYK	digital by decompressor	double	78	1.1	8.2	Ergonomic double strap harness Safe (mod. B)	
6.5 L	650004	62.0	4.5/3.3	WYK	digital by decompressor	double	78	1.1	8.4	Professional blade	

12

MOD. 2.5 - 3.5 4 stroke engine - shaft ø 26 mm



4 STROKE ENGINE



Model	Code	Displacement cc	Power Hp/Kw	Carburettor Walbro	Ignition	Air filter	Clutch ø mm	Fuel tank capacity lt.	Weight kg	Equipment	Price
2.5 4T L	254T04	24.5	1.1/0.81	WYL	digital	single	54	0.5-oil 0.08	6.1	Nylon head 120 10x1.25 sx. f.	
2.5 4T B	254T02	24.5	1.1/0.81	WYL	digital	single	54	0.5-oil 0.08	6.5		
3.5 4T L	354T04	33.5	1.6/1.18	WYL	digital	double	78	0.65-oil 0.1	6.8	Ergonomic single strap harness Easy	
3.5 4T B	354T02	33.5	1.6/1.18	WYL	digital	double	78	0.65-oil 0.1	7.2		

Brushcutters

straight shaft

MOD. 4.0 BT - shaft \varnothing 26 mm
MOD. 4.5 BT - 5.5 BT - 6.5 BT - shaft \varnothing 30 mm



PATENTED TDS ANTIVIBRATIONS SYSTEM



The patented Twin Dumper System (TDS) reduces drastically the vibrations. This system allows to adjust and rotate the handle to guarantee the maximum comfort of the operator. The folding handle makes the unit easy to store.

Model	Code	Displacement cc	Power Hp/Kw	Carburettor Walbro	Ignition	Air filter	Clutch \varnothing mm	Fuel tank capacity lt.	Weight kg	Equipment	Price
4.0 BT	404002	38.0	2.3/1.7	WYK	digital	single	78	0.8	7.4	Nylon head 120 (150 for mod. 6.5) 10x1.25 sx. f.	
4.5 BT	454002	42.7	2.6/1.9	WYK	digital	double	78	1.1	8.4		
5.5 BT	554002	51.7	3.0/2.2	WYK	digital by decompressor	double	78	1.1	8.4	Ergonomic double strap harness Safe Professional blade	
6.5 BT	654002	62.0	4.5/3.3	WYK	digital by decompressor	double	78	1.1	8.9		

Attachments

for brushcutters \varnothing 26mm shaft

HANDLE MODIFICATION KITS



from L to B

from B/BT to L

from B to BT

Model	Code	Shaft	Price
from L to B	20715	\varnothing 26	
from L to B	20505	\varnothing 30	

Model	Code	Shaft	Price
from B/BT to L	20716	\varnothing 26	
from B/BT to L	20506	\varnothing 30	

Model	Code	Shaft	Price
from B to BT	22876	\varnothing 26	
from B to BT	22877	\varnothing 30	

HEDGE TRIMMER ATTACHMENTS



Hedge Trimmer T550



Hedge Trimmer T480 ULTRALIGHT



Ideal for cutting hedges, even if difficult to reach; can be used also to cut long grass or to clean flower beds. 7 positions to guarantee the maximum comfort in any working condition. The chrome-vanadium heavy duty blades ensure the best finish and the maximum resistance to breakages.

Model	Code	Blade mm / inches	Price
T550	600010	550 / 22"	
T480 Ultralight	600810	480 / 19"	

PRUNER ATTACHMENTS



Straight



Bent



High performances professional pruners

Specifications:

- Oil tank capacity 100 cc
- Steel oil pump
- 2 holding points to fix the bar
- Automatic lubrication of the chain
- Special flywheel to improve the pruner performance
- Special hook useful to catch the branches

Model	Code	Bar mm / inches	Price
Straight 3/8" P9038	600005	254 / 10"	
Straight 1/4" P9014	610005	203 / 8"	
Bent 3/8" P3538	600003	254 / 10"	
Bent 1/4" P3539	610003	203 / 8"	